

Oblouk 15°

Popis

15° Plastový oblouk



PVC

#	HMOTNOST	FAR	DA	W	L	TOL	S
1	0.000	RAL 7011	50	15	25	0.3	1.8
2	0.060	RAL 7011	63	15	25	0.3	1.8
3	0.120	RAL 7011	75	15	40	0.3	1.8
4	0.160	RAL 7011	90	15	40	0.3	1.8
5	0.180	RAL 7011	110	15	40	0.3	1.8
6	0.160	RAL 7011	125	15	40	0.3	1.8
7	0.260	RAL 7011	140	15	40	0.4	1.8
8	0.320	RAL 7011	160	15	40	0.4	1.8
9	0.380	RAL 7011	180	15	40	0.4	1.8
10	0.460	RAL 7011	200	15	40	0.4	1.8
11	0.560	RAL 7011	225	15	40	0.5	1.8
12	0.720	RAL 7011	250	15	40	0.5	2.0
13	1100	RAL 7011	280	15	50	0.6	2.3
14	1460	RAL 7011	315	15	50	0.6	2.5
15	1780	RAL 7011	355	15	50	0.7	2.9
16	2480	RAL 7011	400	15	50	0.7	3.2
17	0.000	RAL 7011	450	15	50	0.8	3.6
18	3400	RAL 7011	500	15	50	0.9	4.0
19	5600	RAL 7011	600	15	60	1.0	6.0
20	0.000	RAL 7011	700	15	70	2.5	6.0
21	0.000	RAL 7011	800	15	80	3.0	8.0
22	0.000	RAL 7011	900	15	90	3.0	8.0
23	0.000	RAL 7011	1000	15	100	4.0	10.0
24	0.000	RAL 7011	1250	15	130	4.0	12.0

PE

#	HMOTNOST	FAR	DA	W	L	TOL	S
25	0.000	black	50	15	25	0.7	3.0
26	0.000	black	63	15	25	0.7	3.0
27	0.000	black	75	15	40	0.7	3.0
28	0.000	black	90	15	40	0.9	3.0
29	0.000	black	110	15	40	1.0	3.0
30	0.120	black	125	15	40	1.2	3.0
31	0.000	black	140	15	40	1.3	3.0
32	0.180	black	160	15	40	1.5	3.0
33	0.000	black	180	15	40	1.7	3.0
34	0.240	black	200	15	40	1.8	3.0
35	0.300	black	225	15	40	1.9	3.5
36	0.000	black	250	15	40	2.0	3.5
37	1200	black	280	15	50	2.2	3.5
38	0.700	black	315	15	50	2.4	4.0
39	0.000	black	355	15	50	2.7	4.0
40	1320	black	400	15	50	3.0	4.5
41	2200	black	450	15	50	3.5	5.0
42	0.000	black	500	15	50	4.0	5.0
43	0.000	black	560	15	60	4.5	5.0
44	0.000	black	600	15	60	4.5	6.0
45	0.000	black	630	15	70	4.5	6.0
46	0.000	black	700	15	70	4.5	6.0
47	0.000	black	710	15	80	4.5	6.0
48	0.000	black	800	15	80	4.5	8.0
49	0.000	black	900	15	90	4.5	8.0
50	0.000	black	1000	15	100	5.0	10.0
51	0.000	black	1200	15	120	5.0	12.0
52	0.000	black	1250	15	130	5.0	12.0

PP

#	HMOTNOST	FAR	DA	W	L	TOL	S
53	0.000	RAL 7032	50	15	25	0.7	3.0
54	0.000	RAL 7032	63	15	25	0.7	3.0
55	0.000	RAL 7032	75	15	40	0.7	3.0
56	0.080	RAL 7032	90	15	40	0.9	3.0
57	0.000	RAL 7032	110	15	40	1.0	3.0
58	0.120	RAL 7032	125	15	40	1.2	3.0
59	0.000	RAL 7032	140	15	40	1.3	3.0
60	0.180	RAL 7032	160	15	40	1.5	3.0
61	0.000	RAL 7032	180	15	40	1.7	3.0
62	0.220	RAL 7032	200	15	40	1.8	3.0
63	0.000	RAL 7032	225	15	40	1.9	3.5
64	0.340	RAL 7032	250	15	40	2.0	3.5
65	0.600	RAL 7032	280	15	50	2.2	3.5
66	0.840	RAL 7032	315	15	50	2.4	4.0
67	0.940	RAL 7032	355	15	50	2.7	4.0
68	1120	RAL 7032	400	15	50	3.0	4.5
69	0.000	RAL 7032	450	15	50	3.5	5.0
70	0.000	RAL 7032	500	15	50	4.0	5.0
71	0.000	RAL 7032	560	15	60	4.5	5.0
72	0.000	RAL 7032	600	15	60	4.5	6.0
73	0.000	RAL 7032	630	15	70	4.5	6.0
74	0.000	RAL 7032	700	15	70	4.5	6.0
75	0.000	RAL 7032	710	15	80	4.5	6.0
76	0.000	RAL 7032	800	15	80	4.5	8.0
77	0.000	RAL 7032	900	15	90	4.5	8.0
78	0.000	RAL 7032	1000	15	100	5.0	10.0
79	0.000	RAL 7032	1200	15	120	5.0	12.0
80	0.000	RAL 7032	1250	15	130	5.0	12.0

PPs



#	HMOTNOST	FAR	DA	W	L	TOL	S
81	0.020	RAL 7037	50	15	25	0.7	3.0
82	0.000	RAL 7037	63	15	25	0.7	3.0
83	0.060	RAL 7037	75	15	40	0.7	3.0
84	0.080	RAL 7037	90	15	40	0.9	3.0
85	0.120	RAL 7037	110	15	40	1.0	3.0
86	0.120	RAL 7037	125	15	40	1.2	3.0
87	0.140	RAL 7037	140	15	40	1.3	3.0
88	0.180	RAL 7037	160	15	40	1.5	3.0
89	0.180	RAL 7037	180	15	40	1.7	3.0
90	0.220	RAL 7037	200	15	40	1.8	3.0
91	0.000	RAL 7037	225	15	40	1.9	3.5
92	0.360	RAL 7037	250	15	40	2.0	3.5
93	0.620	RAL 7037	280	15	50	2.2	3.5
94	0.820	RAL 7037	315	15	50	2.4	4.0
95	0.920	RAL 7037	355	15	50	2.7	4.0
96	1220	RAL 7037	400	15	50	3.0	4.5
97	2360	RAL 7037	450	15	50	3.5	5.0
98	3300	RAL 7037	500	15	50	4.0	5.0
99	0.000	RAL 7037	560	15	60	4.5	5.0
100	0.000	RAL 7037	600	15	60	4.5	6.0
101	0.000	RAL 7037	630	15	70	4.5	6.0
102	0.000	RAL 7037	700	15	70	4.5	6.0
103	0.000	RAL 7037	710	15	80	4.5	6.0
104	0.000	RAL 7037	800	15	80	4.5	8.0
105	0.000	RAL 7037	900	15	90	4.5	8.0
106	0.000	RAL 7037	1000	15	100	5.0	10.0
107	0.000	RAL 7037	1200	15	120	5.0	12.0
108	0.000	RAL 7037	1250	15	130	5.0	12.0

PVDF

#	HMOTNOST	FAR	DA	W	L	TOL	S
109	0.190	nature	75	15	40	0.7	3.0
110	0.000	nature	110	15	40	1.0	3.0
111	0.000	nature	160	15	40	1.5	3.0
112	0.000	nature	200	15	40	1.8	3.0
113	0.000	nature	250	15	40	2.0	3.5
114	0.000	nature	315	15	50	2.4	4.0
115	0.000	nature	400	15	50	3.0	4.5

PP-EL-s

#	HMOTNOST	FAR	DA	W	L	TOL	S
116	0.000	black	50	15	25	0.7	3.0
117	0.000	black	63	15	25	0.7	3.0
118	0.100	black	75	15	40	0.7	3.0
119	0.000	black	90	15	40	0.9	3.0
120	0.000	black	110	15	40	1.0	3.0
121	0.000	black	125	15	40	1.2	3.0
122	0.000	black	140	15	40	1.3	3.0
123	0.000	black	160	15	40	1.5	3.0
124	0.000	black	180	15	40	1.7	3.0
125	0.300	black	200	15	40	1.8	3.0
126	0.000	black	225	15	40	1.9	3.5
127	0.480	black	250	15	40	2.0	3.5
128	0.000	black	280	15	50	2.2	3.5
129	0.000	black	315	15	50	2.4	4.0
130	0.000	black	355	15	50	2.7	4.0
131	0.000	black	400	15	50	3.0	4.5
132	0.000	black	450	15	50	3.5	5.0
133	0.000	black	500	15	50	4.0	5.0
134	0.000	black	560	15	60	4.5	5.0
135	0.000	black	600	15	60	4.5	6.0
136	0.000	black	630	15	70	4.5	6.0
137	0.000	black	700	15	70	4.5	6.0
138	0.000	black	710	15	80	4.5	6.0
139	0.000	black	800	15	80	4.5	8.0

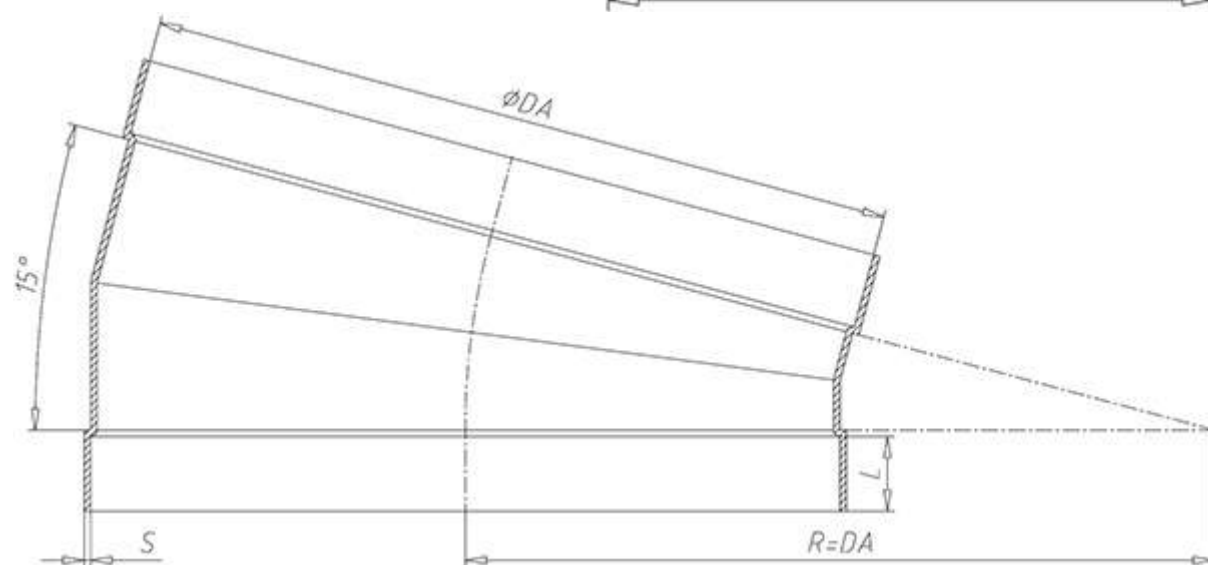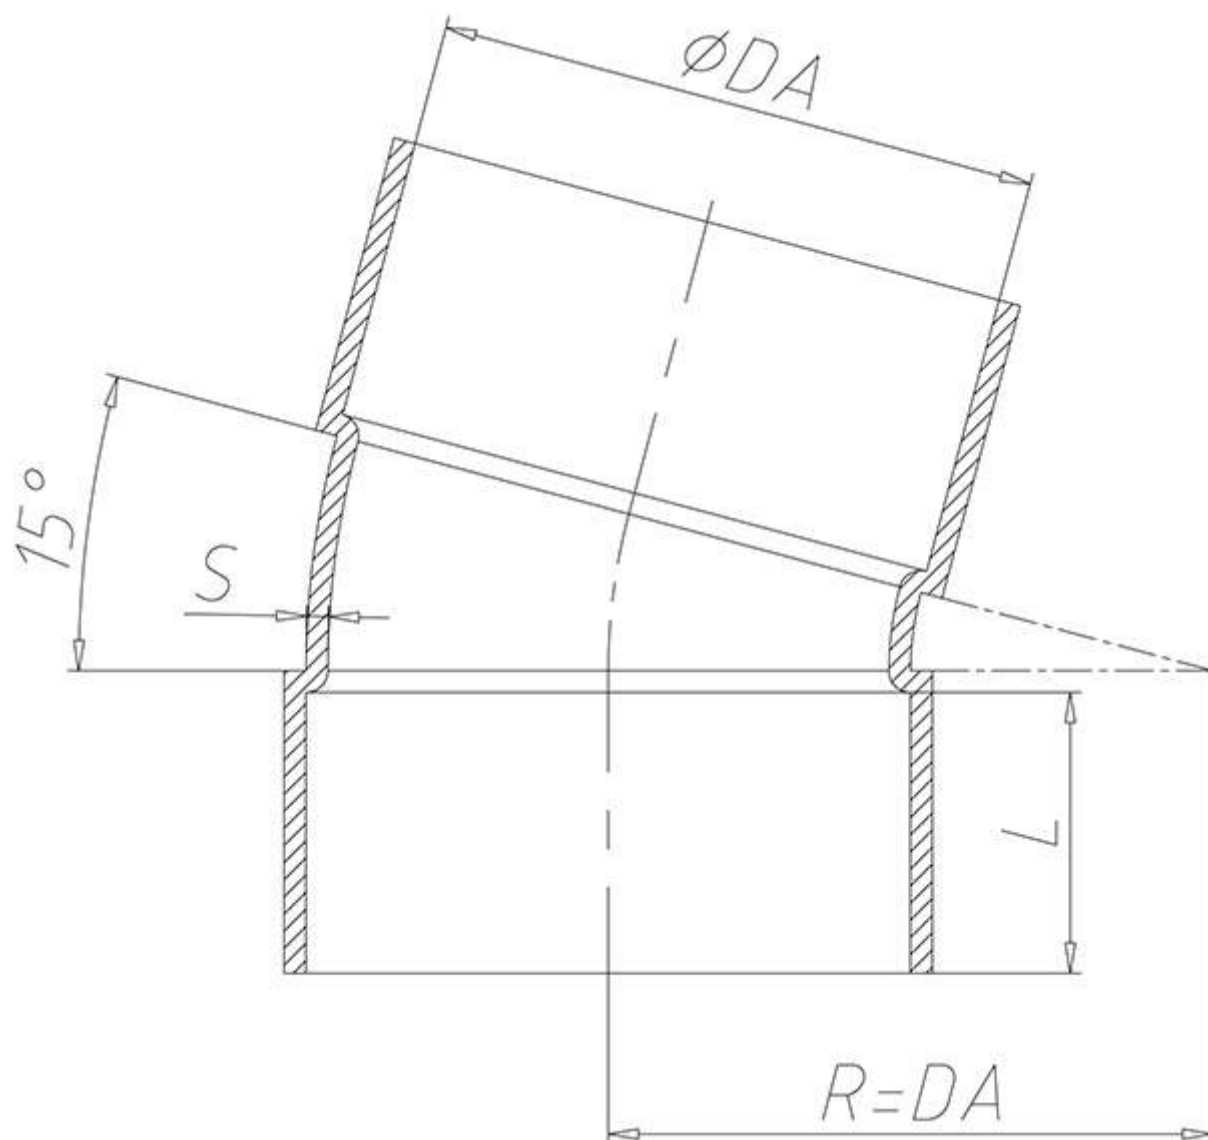



Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

TITAN - PLASTIMEX s.r.o., zastoupení Georg Fischer Piping Systems
email: info@gf.cz
tel. 483360041
www.gf.cz