


Oblouk 60°



Popis

65° Plastový oblouk

PVC

#	HMOTNOST	FAR	DA	W	L	TOL	S
1	0.1	RAL 7011	50	60	25	0.3	1.8
2	0.0	RAL 7011	63	60	25	0.3	1.8
3	0.1	RAL 7011	75	60	40	0.3	1.8
4	0.0	RAL 7011	90	60	40	0.3	1.8
5	0.2	RAL 7011	110	60	40	0.3	1.8
6	0.0	RAL 7011	125	60	40	0.3	1.8
7	0.0	RAL 7011	140	60	40	0.4	1.8
8	0.5	RAL 7011	160	60	40	0.4	1.8
9	0.6	RAL 7011	180	60	40	0.4	1.8
10	0.7	RAL 7011	200	60	40	0.4	1.8
11	0.0	RAL 7011	225	60	40	0.5	1.8
12	1.4	RAL 7011	250	60	40	0.5	2.0
13	2.1	RAL 7011	280	60	50	0.6	2.3
14	2.8	RAL 7011	315	60	50	0.6	4.9
15	3.6	RAL 7011	355	60	50	0.7	2.9
16	5.0	RAL 7011	400	60	50	0.7	3.2
17	0.0	RAL 7011	450	60	50	0.8	3.6
18	0.0	RAL 7011	500	60	50	0.9	4.0
19	12.4	RAL 7011	600	60	60	1.0	6.0
20	0.0	RAL 7011	700	60	70	2.5	6.0
21	0.0	RAL 7011	800	60	80	3.0	8.0
22	39.0	RAL 7011	900	60	90	3.0	8.0
23	0.0	RAL 7011	1000	60	100	4.0	10.0
24	99.0	RAL 7011	1200	60	120	4.0	12.0
25	0.0	RAL 7011	1250	60	130	4.0	12.0

PE

#	HMOTNOST	FAR	DA	W	L	TOL	S
26	0.0	black	50	60	25	0.7	3.0
27	0.0	black	63	60	25	0.7	3.0
28	0.0	black	75	60	40	0.7	3.0
29	0.0	black	90	60	40	0.9	3.0
30	0.2	black	110	60	40	1.0	3.0
31	0.0	black	125	60	40	1.2	3.0
32	0.0	black	140	60	40	1.3	3.0
33	0.4	black	160	60	40	1.5	3.0
34	0.0	black	180	60	40	1.7	3.0
35	0.7	black	200	60	40	1.8	3.0
36	0.0	black	225	60	40	1.9	3.5
37	1.2	black	250	60	40	2.0	3.5
38	0.0	black	280	60	50	2.2	3.5
39	1.7	black	315	60	50	2.4	4.0
40	0.0	black	355	60	50	2.7	4.0
41	3.1	black	400	60	50	3.0	4.5
42	5.0	black	450	60	50	3.5	5.0
43	3.8	black	500	60	50	4.0	5.0
44	0.0	black	560	60	60	4.5	5.0
45	0.0	black	600	60	60	4.5	6.0
46	0.0	black	630	60	70	4.5	6.0
47	0.0	black	700	60	70	4.5	6.0
48	0.0	black	710	60	80	4.5	6.0
49	0.0	black	800	60	80	4.5	8.0
50	0.0	black	900	60	90	4.5	8.0
51	0.0	black	1000	60	100	5.0	10.0
52	0.0	black	1200	60	120	5.0	12.0
53	0.0	black	1250	60	130	5.0	12.0

PP

#	HMOTNOST	FAR	DA	W	L	TOL	S
54	0.0	RAL 7032	50	60	25	0.7	3.0
55	0.0	RAL 7032	63	60	25	0.7	3.0
56	0.1	RAL 7032	75	60	40	0.7	3.0
57	0.0	RAL 7032	90	60	40	0.9	3.0
58	0.0	RAL 7032	110	60	40	1.0	3.0
59	0.0	RAL 7032	125	60	40	1.2	3.0
60	0.0	RAL 7032	140	60	40	1.3	3.0
61	0.5	RAL 7032	160	60	40	1.5	3.0
62	1.1	RAL 7032	180	60	40	1.7	3.0
63	0.7	RAL 7032	200	60	40	1.8	3.0
64	0.8	RAL 7032	225	60	40	1.9	3.5
65	1.2	RAL 7032	250	60	40	2.0	3.5
66	1.3	RAL 7032	280	60	50	2.2	3.5
67	1.7	RAL 7032	315	60	50	2.4	4.0
68	0.0	RAL 7032	355	60	50	2.7	4.0
69	0.0	RAL 7032	400	60	50	3.0	4.5
70	0.0	RAL 7032	450	60	50	3.5	5.0
71	16.0	RAL 7032	500	60	50	4.0	5.0
72	0.0	RAL 7032	560	60	60	4.5	5.0
73	0.0	RAL 7032	600	60	60	4.5	6.0
74	0.0	RAL 7032	630	60	70	4.5	6.0
75	0.0	RAL 7032	700	60	70	4.5	6.0
76	0.0	RAL 7032	710	60	80	4.5	6.0
77	20.0	RAL 7032	800	60	80	4.5	8.0
78	0.0	RAL 7032	900	60	90	4.5	8.0
79	0.0	RAL 7032	1000	60	100	5.0	10.0
80	0.0	RAL 7032	1200	60	120	5.0	12.0
81	0.0	RAL 7032	1250	60	130	5.0	12.0

PPs


#	HMOTNOST	FAR	DA	W	L	TOL	S
82	0.0	RAL 7037	50	60	25	0.7	3.0
83	0.0	RAL 7037	63	60	25	0.7	3.0
84	0.2	RAL 7037	75	60	40	0.7	3.0
85	0.1	RAL 7037	90	60	40	0.9	3.0
86	0.2	RAL 7037	110	60	40	1.0	3.0
87	0.3	RAL 7037	125	60	40	1.2	3.0
88	0.3	RAL 7037	140	60	40	1.3	3.0
89	0.4	RAL 7037	160	60	40	1.5	3.0
90	0.0	RAL 7037	180	60	40	1.7	3.0
91	0.7	RAL 7037	200	60	40	1.8	3.0
92	0.0	RAL 7037	225	60	40	1.9	3.5
93	1.2	RAL 7037	250	60	40	2.0	3.5
94	1.2	RAL 7037	280	60	50	2.2	3.5
95	1.7	RAL 7037	315	60	50	2.4	4.0
96	2.1	RAL 7037	355	60	50	2.7	4.0
97	3.0	RAL 7037	400	60	50	3.0	4.5
98	4.8	RAL 7037	450	60	50	3.5	5.0
99	7.0	RAL 7037	500	60	50	4.0	5.0
100	0.0	RAL 7037	560	60	60	4.5	5.0
101	0.0	RAL 7037	600	60	60	4.5	6.0
102	0.0	RAL 7037	630	60	70	4.5	6.0
103	0.0	RAL 7037	700	60	70	4.5	6.0
104	0.0	RAL 7037	710	60	80	4.5	6.0
105	0.0	RAL 7037	800	60	80	4.5	8.0
106	0.0	RAL 7037	900	60	90	4.5	8.0
107	0.0	RAL 7037	1000	60	100	5.0	10.0
108	0.0	RAL 7037	1200	60	120	5.0	12.0
109	0.0	RAL 7037	1250	60	130	5.0	12.0


PVDF

#	HMOTNOST	FAR	DA	W	L	TOL	S
110	0.2	nature	75	60	40	0.7	3.0
111	0.2	nature	110	60	40	1.0	3.0
112	0.2	nature	160	60	40	1.5	3.0
113	0.2	nature	200	60	40	1.8	3.0
114	0.2	nature	250	60	40	1.9	3.5
115	0.2	nature	315	60	50	2.4	4.0
116	0.2	nature	400	60	50	3.0	4.5

PP-EL-s

#	HMOTNOST	FAR	DA	W	L	TOL	S
117	0.0	black	50	60	25	0.7	3.0
118	0.0	black	63	60	25	0.7	3.0
119	0.2	black	75	60	40	0.7	3.0
120	0.0	black	90	60	40	0.9	3.0
121	0.3	black	110	60	40	1.0	3.0
122	0.0	black	125	60	40	1.2	3.0
123	0.0	black	140	60	40	1.3	3.0
124	0.0	black	160	60	40	1.5	3.0
125	0.0	black	180	60	40	1.7	3.0
126	0.0	black	200	60	40	1.8	3.0
127	0.0	black	225	60	40	1.9	3.5
128	1.6	black	250	60	40	2.0	3.5
129	0.0	black	280	60	50	2.2	3.5
130	0.0	black	315	60	50	2.4	4.0
131	0.0	black	355	60	50	2.7	4.0
132	3.8	black	400	60	50	3.0	4.5
133	0.0	black	450	60	50	3.5	5.0
134	0.0	black	500	60	50	4.0	5.0
135	0.0	black	560	60	60	4.5	5.0
136	0.0	black	600	60	60	4.5	6.0
137	0.0	black	630	60	70	4.5	6.0
138	0.0	black	700	60	70	4.5	6.0
139	0.0	black	710	60	80	4.5	6.0
140	0.0	black	800	60	80	4.5	8.0

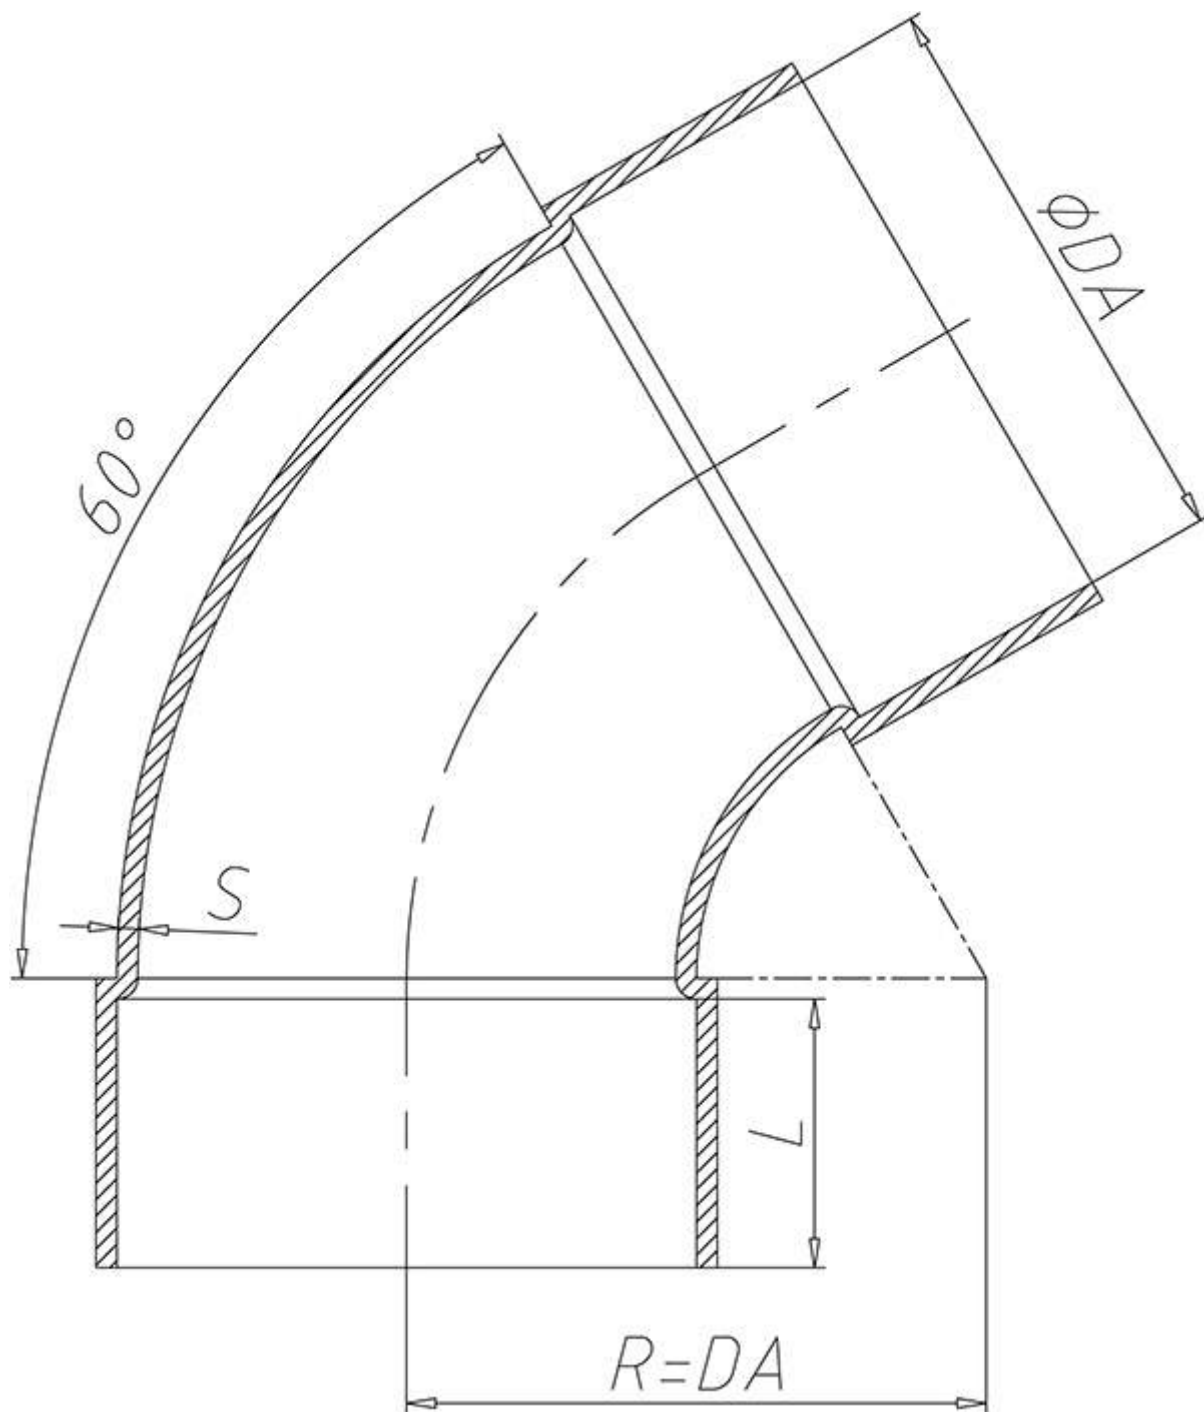

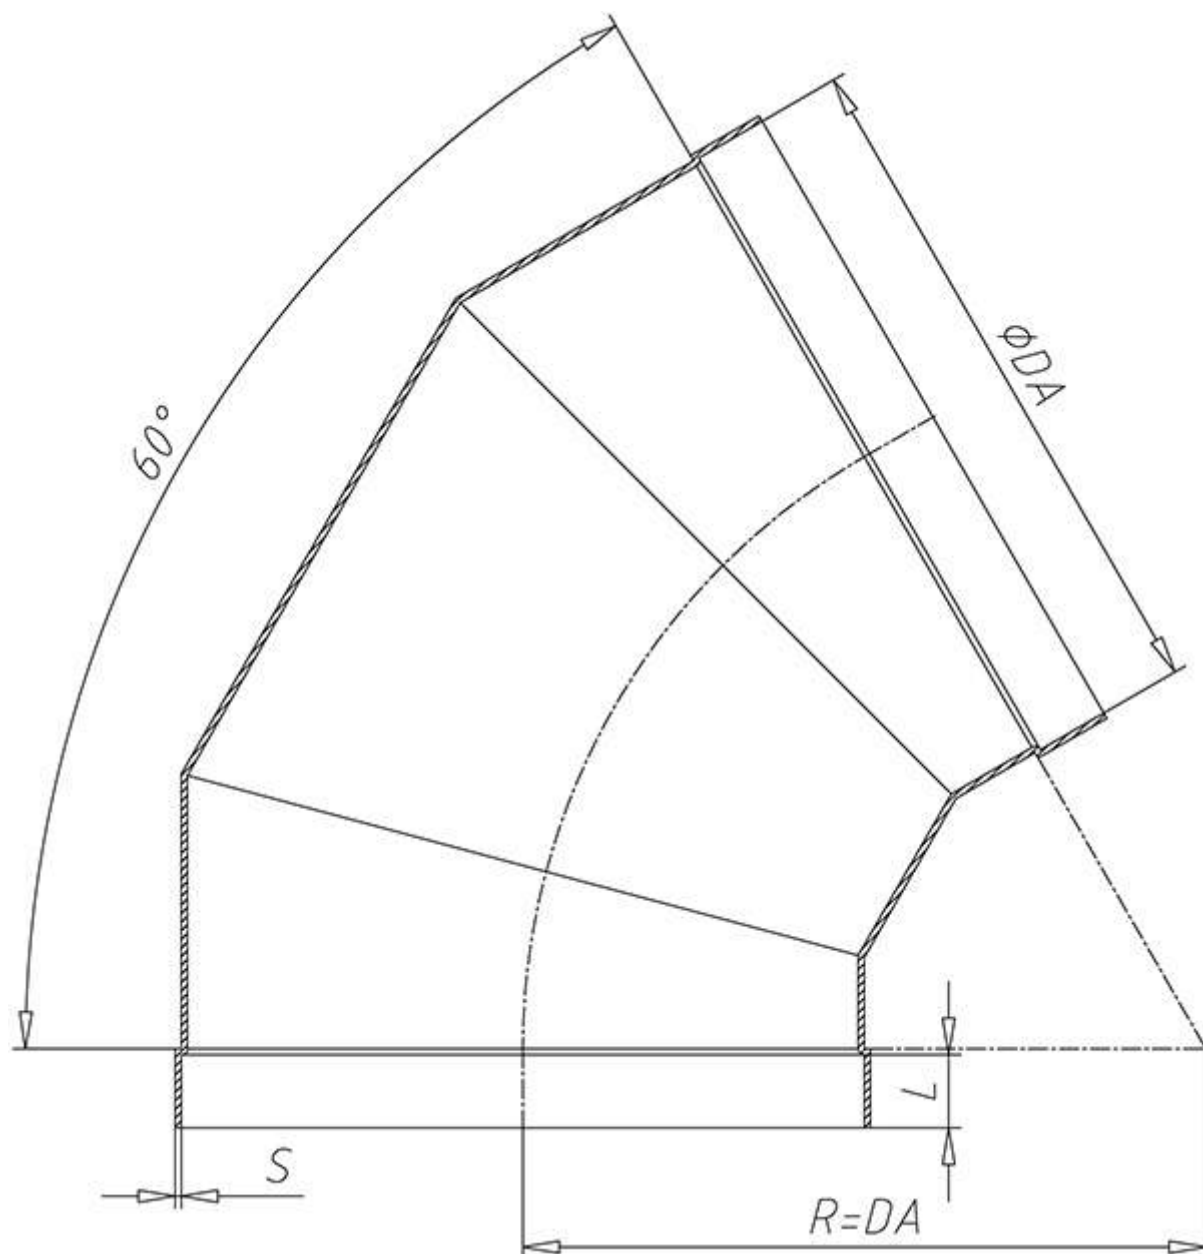



Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

TITAN - PLASTIMEX s.r.o., zastoupení Georg Fischer Piping Systems
email: info@gf.cz
tel. 483360041
www.gf.cz