

Spojka



Popis

Plastové spojky

PVC

#	HMOTNOST	FAR	DA	L	L1	TOL	S
1	0.028	RAL 7011	50	45	45	0.3	2.5
2	0.035	RAL 7011	63	45	45	0.3	2.5
3	0.105	RAL 7011	75	40	85	0.3	2.5
4	0.119	RAL 7011	90	40	85	0.3	2.5
5	0.118	RAL 7011	110	40	85	0.3	2.5
6	0.137	RAL 7011	125	40	85	0.3	2.5
7	0.147	RAL 7011	140	40	85	0.4	2.5
8	0.173	RAL 7011	160	40	85	0.4	2.5
9	0.205	RAL 7011	180	40	85	0.4	2.5
10	0.222	RAL 7011	200	40	85	0.4	2.5
11	0.270	RAL 7011	225	40	85	0.5	2.5
12	0.310	RAL 7011	250	40	85	0.5	2.5
13	0.480	RAL 7011	280	50	105	0.6	2.5
14	0.567	RAL 7011	315	50	105	0.6	2.5
15	0.679	RAL 7011	355	50	105	0.7	3.0
16	0.747	RAL 7011	400	50	105	0.7	3.0
17	1080	RAL 7011	450	55	120	0.8	5.0
18	1400	RAL 7011	500	55	120	0.9	5.0
19	1800	RAL 7011	600	55	120	1.0	6.0
20	2880	RAL 7011	700	70	150	2.5	6.0
21	0.000	RAL 7011	800	80	170	3.0	8.0
22	0.000	RAL 7011	900	90	190	3.0	8.0
23	9000	RAL 7011	1000	100	210	4.0	10.0
24	0.000	RAL 7011	1250	130	270	4.0	12.0

PE

#	HMOTNOST	FAR	DA	L	L1	TOL	S
25	0.019	black	50	45	45	0.7	3.0
26	0.031	black	63	45	45	0.7	3.0
27	0.077	black	75	40	85	0.7	3.0
28	0.088	black	90	40	85	0.9	3.0
29	0.095	black	110	40	85	1.0	3.0
30	0.105	black	125	40	85	1.2	3.0
31	0.107	black	140	40	85	1.3	3.0
32	0.136	black	160	40	85	1.5	3.0
33	0.178	black	180	40	85	1.7	3.0
34	0.199	black	200	40	85	1.8	3.0
35	0.196	black	225	40	85	1.9	3.5
36	0.286	black	250	40	85	2.0	3.5
37	0.388	black	280	50	105	2.2	3.5
38	0.575	black	315	50	105	2.4	4.0
39	0.619	black	355	50	105	2.7	4.0
40	0.811	black	400	50	105	3.0	4.5
41	1000	black	450	55	120	3.5	5.0
42	1020	black	500	55	120	4.0	5.0
43	1300	black	560	55	120	4.5	6.0
44	0.000	black	600	55	120	4.5	6.0
45	1400	black	630	55	120	4.5	6.0
46	2000	black	700	70	150	4.5	6.0
47	2300	black	710	80	170	4.5	6.0
48	3400	black	800	80	170	4.5	8.0
49	0.000	black	900	90	190	4.5	8.0
50	6600	black	1000	100	210	5.0	10.0
51	0.000	black	1200	120	250	5.0	12.0
52	0.000	black	1250	130	270	5.0	12.0

PP

#	HMOTNOST	FAR	DA	L	L1	TOL	S
53	0.031	RAL 7032	50	45	45	0.7	3.0
54	0.022	RAL 7032	63	45	45	0.7	3.0
55	0.073	RAL 7032	75	40	85	0.7	3.0
56	0.081	RAL 7032	90	40	85	0.9	3.0
57	0.094	RAL 7032	110	40	85	1.0	3.0
58	0.104	RAL 7032	125	40	85	1.2	3.0
59	0.117	RAL 7032	140	40	85	1.3	3.0
60	0.136	RAL 7032	160	40	85	1.5	3.0
61	0.171	RAL 7032	180	40	85	1.7	3.0
62	0.201	RAL 7032	200	40	85	1.8	3.0
63	0.225	RAL 7032	225	40	85	1.9	3.5
64	0.280	RAL 7032	250	40	85	2.0	3.5
65	0.383	RAL 7032	280	50	105	2.2	3.5
66	0.589	RAL 7032	315	50	105	2.4	4.0
67	0.605	RAL 7032	355	50	105	2.7	4.0
68	0.811	RAL 7032	400	50	105	3.0	4.5
69	0.800	RAL 7032	450	55	120	3.5	5.0
70	0.940	RAL 7032	500	55	120	4.0	5.0
71	1300	RAL 7032	560	55	120	4.5	6.0
72	0.000	RAL 7032	600	55	120	4.5	6.0
73	1420	RAL 7032	630	55	120	4.5	6.0
74	0.000	RAL 7032	700	70	150	4.5	6.0
75	2200	RAL 7032	710	80	170	4.5	6.0
76	3300	RAL 7032	800	80	170	4.5	8.0
77	4000	RAL 7032	900	90	190	4.5	8.0
78	0.000	RAL 7032	1000	100	210	5.0	10.0
79	0.000	RAL 7032	1200	120	250	5.0	12.0
80	0.000	RAL 7032	1250	130	270	5.0	12.0

PPs


#	HMOTNOST	FAR	DA	L	L1	TOL	S
81	0.018	RAL 7037	50	45	45	0.7	3.0
82	0.022	RAL 7037	63	45	45	0.7	3.0
83	0.070	RAL 7037	75	40	85	0.7	3.0
84	0.083	RAL 7037	90	40	85	0.9	3.0
85	0.097	RAL 7037	110	40	85	1.0	3.0
86	0.107	RAL 7037	125	40	85	1.2	3.0
87	0.121	RAL 7037	140	40	85	1.3	3.0
88	0.136	RAL 7037	160	40	85	1.5	3.0
89	0.166	RAL 7037	180	40	85	1.7	3.0
90	0.202	RAL 7037	200	40	85	1.8	3.0
91	0.231	RAL 7037	225	40	85	1.9	3.5
92	0.280	RAL 7037	250	40	85	2.0	3.5
93	0.415	RAL 7037	280	50	105	2.2	3.5
94	0.590	RAL 7037	315	50	105	2.4	4.0
95	0.615	RAL 7037	355	50	105	2.7	4.0
96	0.814	RAL 7037	400	50	105	3.0	4.5
97	0.880	RAL 7037	450	55	120	3.5	5.0
98	1160	RAL 7037	500	55	120	4.0	5.0
99	1080	RAL 7037	560	55	120	4.5	6.0
100	1380	RAL 7037	600	55	120	4.5	6.0
101	1460	RAL 7037	630	55	120	4.5	6.0
102	0.000	RAL 7037	700	70	150	4.5	6.0
103	2260	RAL 7037	710	80	170	4.5	6.0
104	3420	RAL 7037	800	80	170	4.5	8.0
105	4400	RAL 7037	900	90	190	4.5	8.0
106	6580	RAL 7037	1000	100	210	5.0	10.0
107	0.000	RAL 7037	1200	120	250	5.0	12.0
108	0.000	RAL 7037	1250	130	270	5.0	12.0

PVDF

#	HMOTNOST	FAR	DA	L	L1	TOL	S
109	0.175	nature	75	40	85	0.7	3.0
110	0.177	nature	110	40	85	1.0	3.0
111	0.250	nature	160	40	85	1.5	3.0
112	0.460	nature	200	40	85	1.8	3.0
113	0.455	nature	250	40	85	2.0	3.5
114	1083	nature	315	50	105	2.4	4.0
115	1513	nature	400	50	105	3.0	4.5

PP-EL-s

#	HMOTNOST	FAR	DA	L	L1	TOL	S
116	0.024	black	50	45	45	0.7	3.0
117	0.030	black	63	45	45	0.7	3.0
118	0.093	black	75	40	85	0.7	3.0
119	0.109	black	90	40	85	0.9	3.0
120	0.127	black	110	40	85	1.0	3.0
121	0.141	black	125	40	85	1.2	3.0
122	0.001	black	140	40	85	1.3	3.0
123	0.183	black	160	40	85	1.5	3.0
124	0.216	black	180	40	85	1.7	3.0
125	0.259	black	200	40	85	1.8	3.0
126	0.377	black	225	40	85	1.9	3.5
127	0.370	black	250	40	85	2.0	3.5
128	0.501	black	280	50	105	2.2	3.5
129	0.777	black	315	50	105	2.4	4.0
130	0.825	black	355	50	105	2.7	4.0
131	1067	black	400	50	105	3.0	4.5
132	0.000	black	450	55	120	3.5	5.0
133	0.000	black	500	55	120	4.0	5.0
134	0.000	black	560	55	120	4.5	6.0
135	0.000	black	630	55	120	4.5	6.0

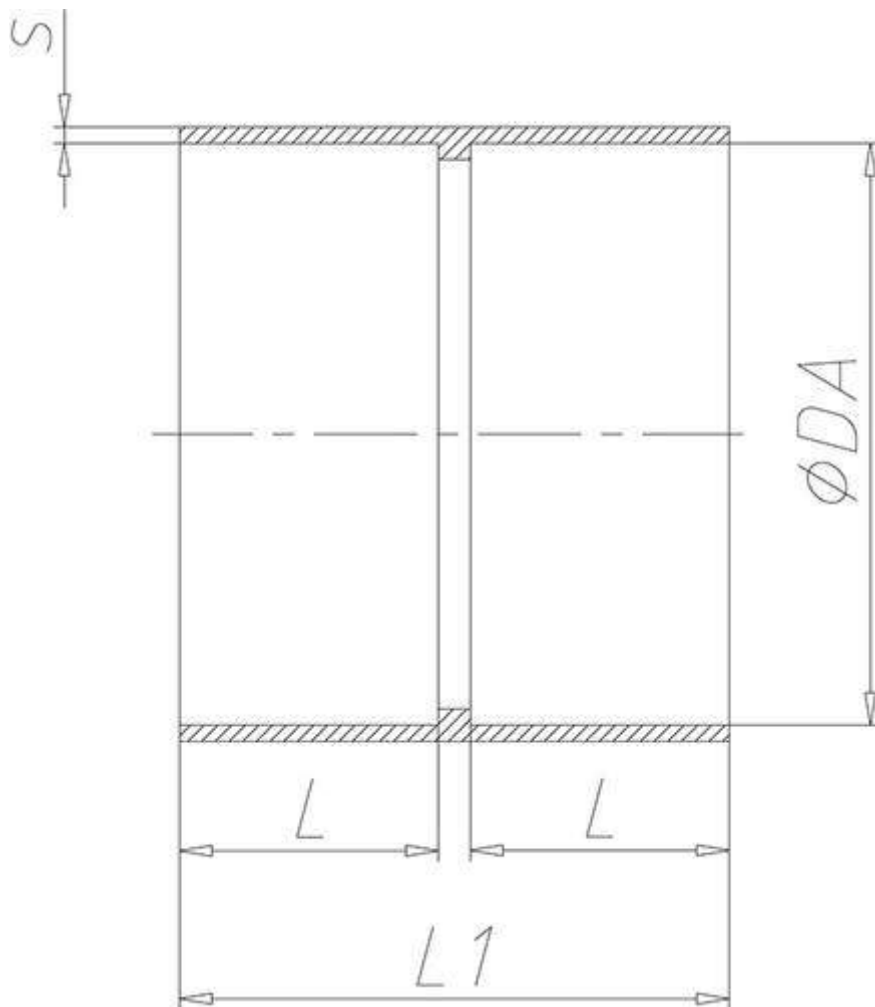



Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

TITAN - PLASTIMEX s.r.o., zastoupení Georg Fischer Piping Systems
email: info@gf.cz
tel. 483360041
www.gf.cz